

MIE

**Magnetic-inductive flowmeters
with communication ETHERNET / MODBUS TCP**


Main advantages

- Cheaper solution without display
- Compact and separated version
- Wide range of process connections
- A lot of material choices of lining and electrodes
- IP68 protection in separate version with stainless steel sensor or housing
- Empty pipe detection
- Ethernet / MODBUS TCP communication
- Power supply over ethernet


Applications

- Water treatment
- Chemical industry
- Food industry
- Mechanical engineering
- Agriculture
- Power engineering


ISO 9001

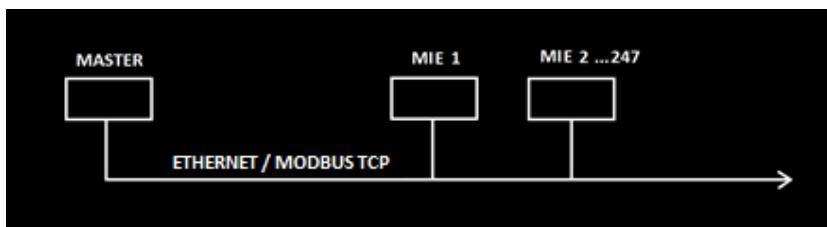

Compact version - type MIE - C

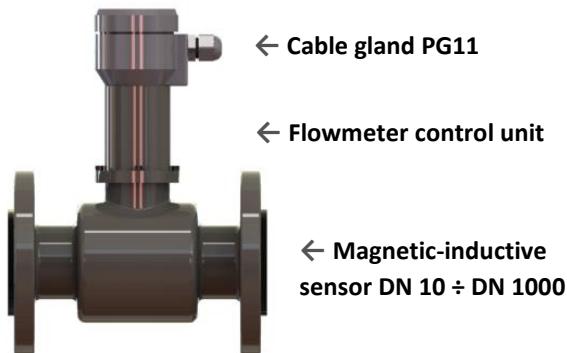


Separated version - type MIE - S

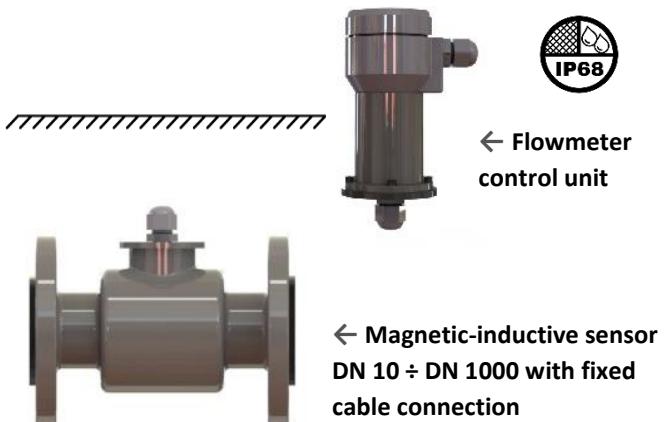

More on www.elabrn.cz



RJ45 connection

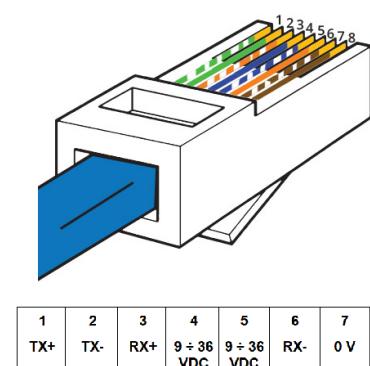



Specifications

Option	compact version separated version (sensor instalated under ground or under liquid level), fixed cable, cable length according to the order (max. 50 m)
Nominal sizes	flange DN 10 ÷ 1000 mm, without flanges DN 10 ÷ 100 mm
Insulation class of excitation coils	class E
Connection	flanged DIN (ANSI, BS, JIS) / hygienic - food DIN 11 851
Maximum pressure	standard 1,6 MPa (0,6 / 1,0 / 2,5 / 4,0 MPa)
Liner material	hard + soft rubber DN 10 ÷ DN 1000 / teflon PTFE DN 10 ÷ DN 500
Electrodes	stainless steel 316Ti (Hastelloy / Tantal / Titan / Platinum)
Outer casing and flanges	carbon steel standard (stainless steel 304, 321)
Flow tube	stainless steel 321
External coating	acrymetal multi component lacquer / polished stainless steel
Protection	IP67-NEMA5 (compact version) / IP68-NEMA6 (separated version)
Media temperature	compact version: 0 ÷ 90 °C separated version: hard rubber (0 ÷ 90 °C), PTFE (-20 ÷ 130 °C)
Accessories options	sensor grounding ring for plastic pipe for DN 10 ÷ DN 40 sensor grounding electrode for DN 50 ÷ DN 1000
Special option	food industry stainless steel version – teflon lining, fitting DIN 11 851 flange version with stainless steel cover – teflon / rubber lining flange all-stainless steel version – teflon / rubber lining without flange version – teflon / rubber lining
Flow direction	both direction
Suppresion of small flows	yes
Empty pipe detection	yes
Electrical conductivity of medium	≥5 µS/cm, for demineralized water ≥20 µS/cm
Accuracy of measurement	0,5 % of measured value + 2 mm/s (reference conditions)
Communication port	ethernet, 10Base-T resp. 100Base-TX, protocol MODBUS TCP (instantneous reading, parameters setting and calibration)
Power supply	ethernet, passive, 9 ÷ 36 V DC / 10 W
Main unit protection	IP67 - NEMA5
Ambient temperature	-20 ÷ 60 °C